




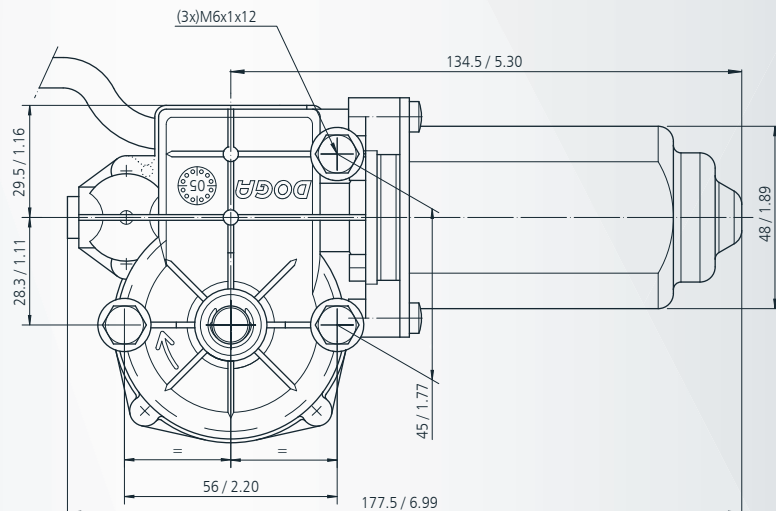


REFERENCIA REFERENCE NUMBER REFERENZNUMMERN	TENSIÓN NOMINAL NOMINAL VOLTAGE TENSION NOMINALE NENNSPANNUNG	PAR NOMINAL NOMINAL TORQUE COUPLE NOMINAL DREHMOMENT NOMINAL	VELOCIDAD NOMINAL NOMINAL SPEED VITESSE NOMINALE GESCHWINDIGKEIT NOMINAL	CORRIENTE NOMINAL NOMINAL CURRENT COURANT NOMINAL NOMINALSTROM	PAR DE ARRANQUE STARTING TORQUE COUPLE DE DEMARRAGE ANZUGSDREHMOMENT	CORRIENTE DE ARRANQUE STARTING CURRENT COURANT DE DEMARRAGE ANLAUFSTROM	EJE SHAFT ARBRE WELLE	CONEXIONES CONNECTIONS CONNEXIONS ANSCHLUSSART	ESQUEMA ELECTRICO WIRING DIAGRAM SCHEMA ELECTRIQUE SCHALTBILD	RELACION DE REDUCCION TRANSMISSION RATIO RAPPORT DE REDUCTEUR UNTERSETZUNG	PESO APROXIMADO APPROXIMATE WEIGHT POIDS APPROXIMATIF GEWICHT (ca.)	GRADO DE ESTANQUEIDAD WATER TIGHTNESS ETANCHÉITÉ FEUCHTIGKEITSSCHUTZKLASSE	MATERIAL RUEDA WHEEL MATERIAL MATERIAL ROUE MAT. DES SCHNECKENRADES	CURVA CURVE COURBE KURVE	Nº PULSOS NUM. PULSES IMPULSANZAHL
	Un (V)	Mn (N.m./lbf.in)	nn (r.p.m.)	In (A)	Ma (N.m./lbf.in)	Ia (A)				i	P (kg/lb.t)	IP			
317.9706.20.00	12	4 / 35	25	2.5	12 / 106	8	E30	C30/C44	F5	62:1	1.15/3.08	IP40	PLA	64	310
317.9706.30.00	24	4 / 35	25	1.1	12 / 106	4	E30	C30/C44	F5	62:1	1.15/3.08	IP40	PLA	64	310

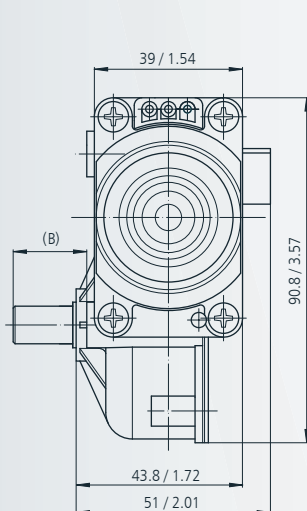

CONEXIONES CONNECTIONS CONNEXIONS ANSCHLUSSART

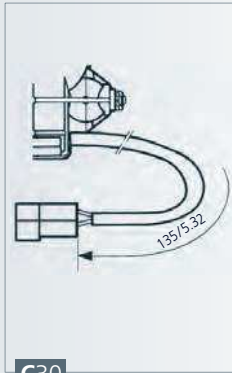


C30

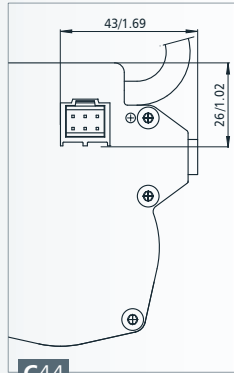


C44

PIN FUNCTION - FUNCIÓN

1	-
2	OUT A
3	OUT B
4	-
5	GND
6	VCC




EJE SHAFT ARBRE WELLE

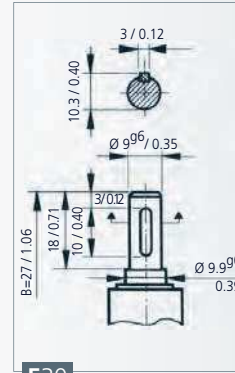

E30

ESQUEMA ELÉCTRICO WIRING DIAGRAM SCHEMA ÉLECTRIQUE SCHALTBILD

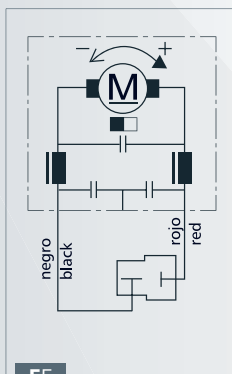


F5

TERMINAL A TERMINAL B ROTATION DIRECTION


GND	VCC	↻
VCC	GND	↻

CURVAS CURVES COURBES KURVEN

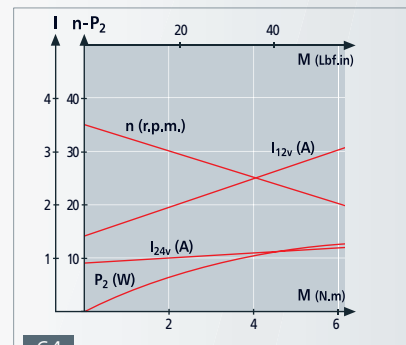

64

ESQUEMA SENSOR HALL SENSOR HALL SCHEMA SENSOR HALL SCHALTBILD HALLSENSOR

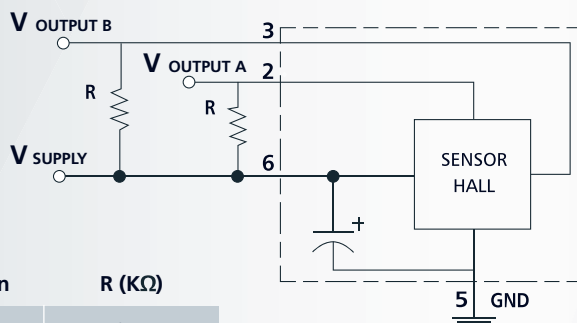

Vout = Vin R (KΩ)

5V	0.5
12V	1.2
24V	2.4

SEÑAL SALIDA OUTPUT SIGNAL SIGNALISATION DE SORTIE AUSGANGSSIGNAL

